



### Public and private usage



Opening: 180DG  
 Load capacity: 20 kg per hinge  
 Glass thickness: 8-10 mm  
 Max glass width: 920 mm  
 Horizontal adjustment: 7 mm

**One hinge consists of:**

- 2 stainless steel 304 pins in M8 x 35 mm for door frame mounting. c/c: 54 mm
- 1 zamak hinge body 67,5 x 60 mm
- 1 stainless steel 304 center pin
- 2 black PA6 plastic bushings
- 1 stainless steel 304 tightening screws M8 x 25 mm
- 2 EPDM gaskets


**Finish:**

- SS-look # 15.25.076
- Black matt # 15.25.077

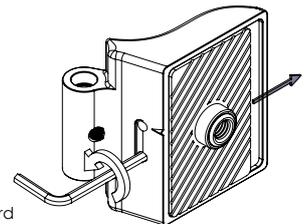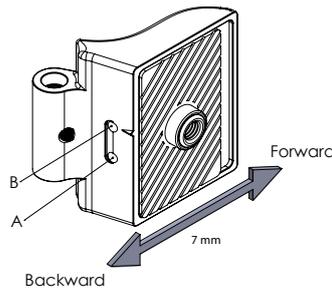




Adjusting Forward

- STEP to move center forward:
- 1) Turn "A" left/loosen as indicated by arrow.
  - 2) Turn "B" left/loosen as indicated (moving center into position)
  - 3) Turn "A" right/tighten (securing the position)



Adjusting Backward

- STEP to move center backward:
- 1) Turn "B" Right/tighten as indicated by arrow.
  - 2) Turn "A" Right/tighten as indicated (moving center into position)
  - 3) Turn "B" left/loosen (securing the position)

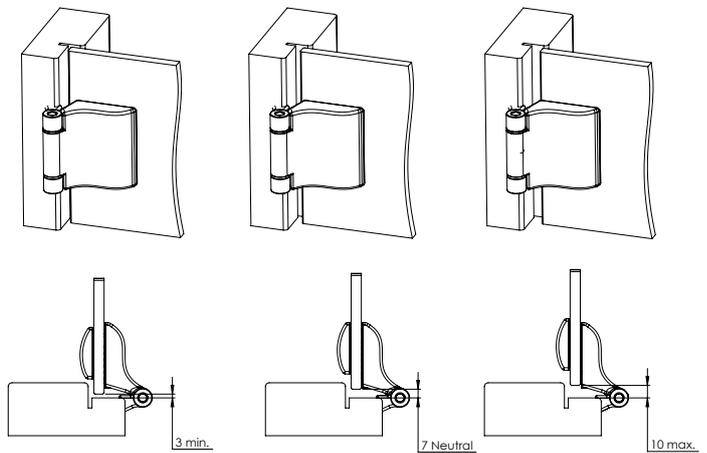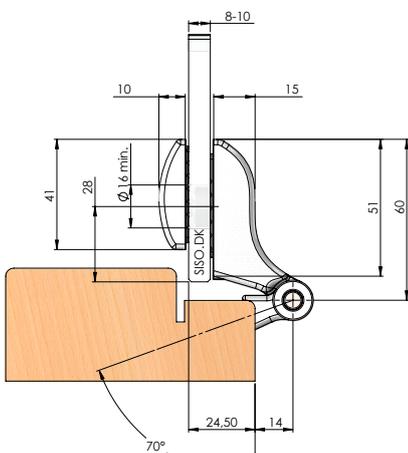

**SISO A/S**