



HYDRAULIC PATCH INSTRUCTION MANUAL


- Product view

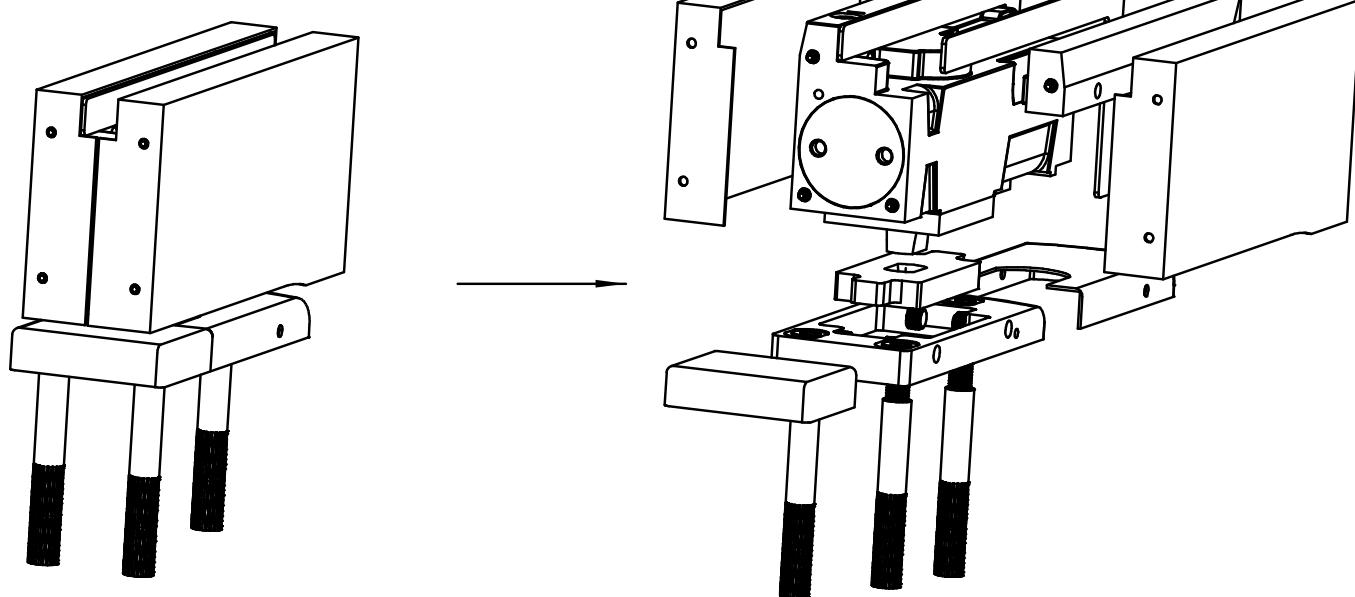

- Keep the gaps as per drawing, make sure the top and bottom pivot center are well aligned.

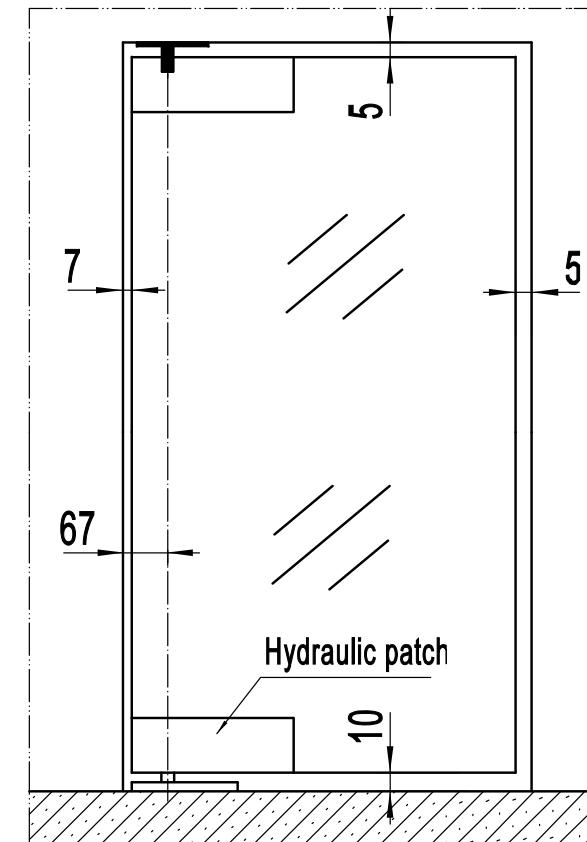


- Dimension:

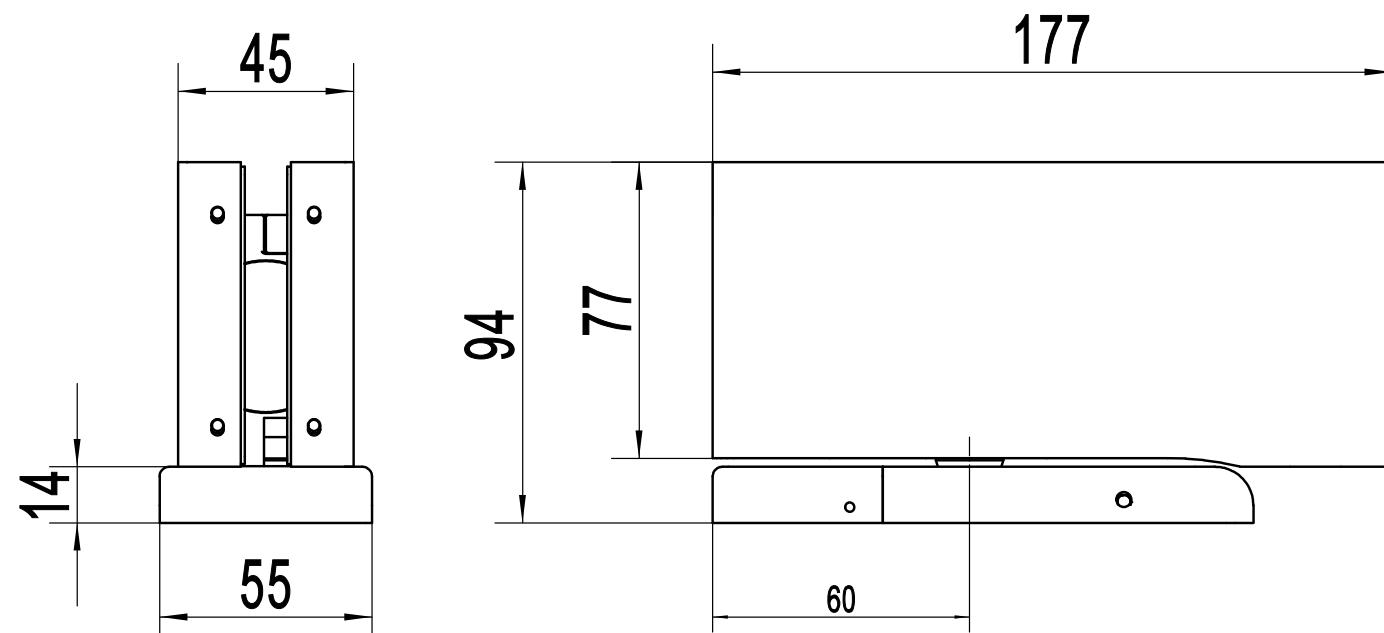


Model	Max.door width (mm)	Max.door weight (kg)
15.24.265	≤1000	100
15.24.268	≤1300	150

- Glass cutout:

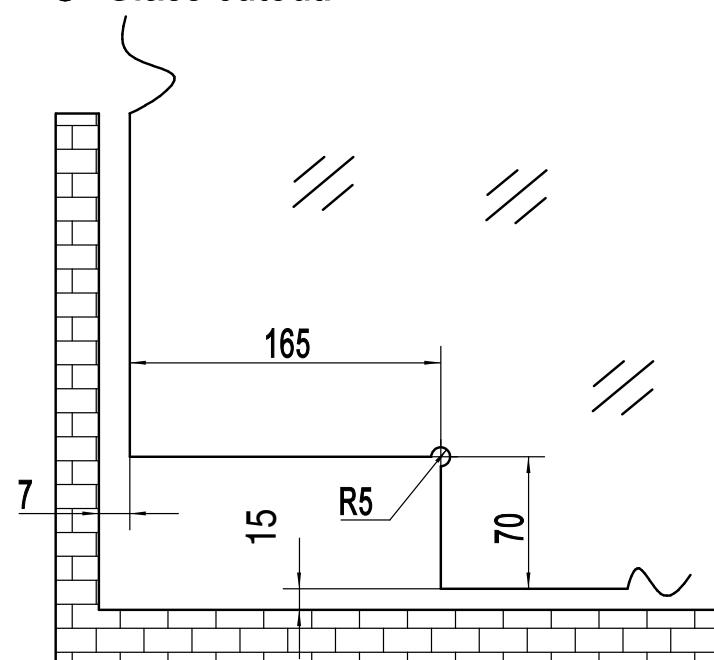

Glass thickness	Application of rubber gasket
	Thickness (1.5mm)
10mm	4
12mm	4
14mm	2


- Functional diagram:

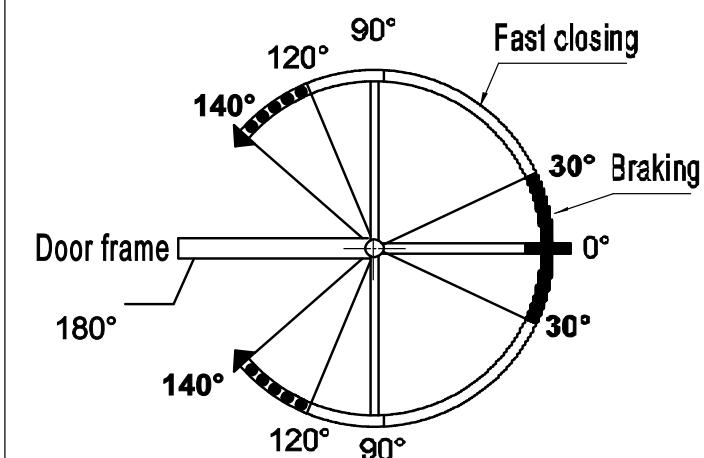


- Features:

1. Open angle: 140° double action
2. Door hold open section: 90° and 140°-120° (Optional)
3. Two speeds adjustable
 - Valve 1: 90°-0°
 - Valve 2: 30°-0°


1

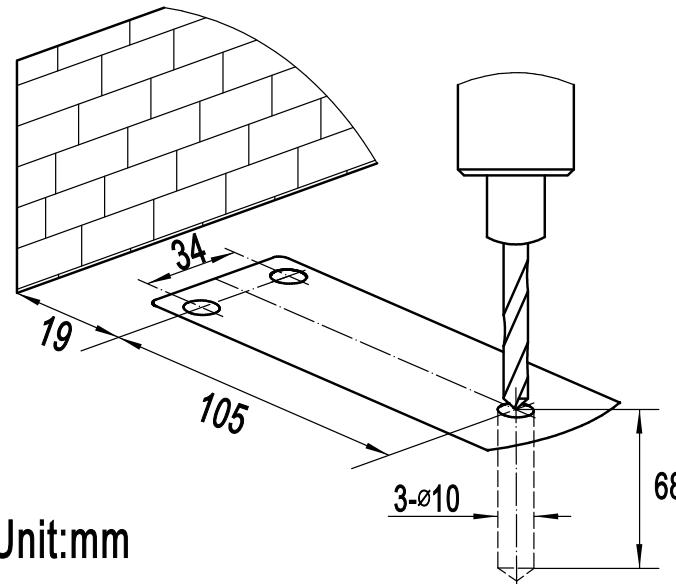


2

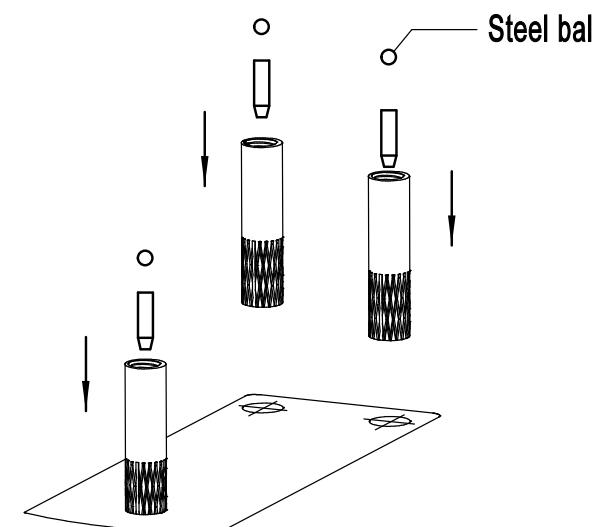


3

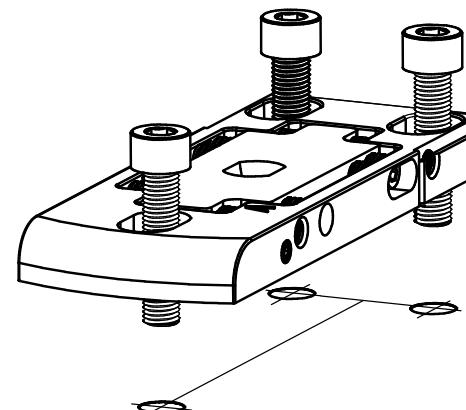


4

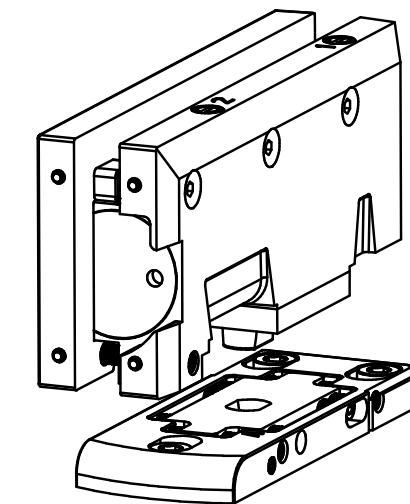


5

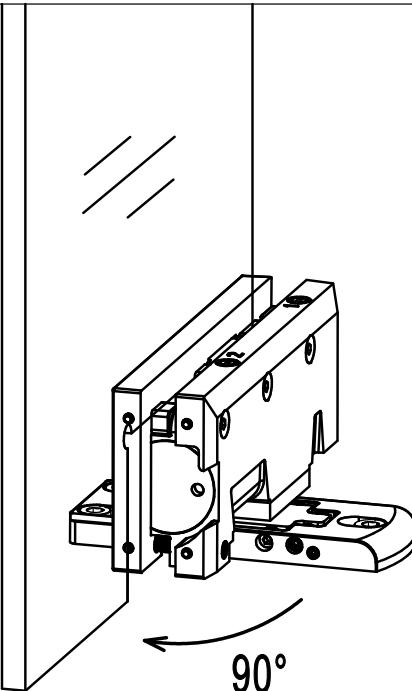


6

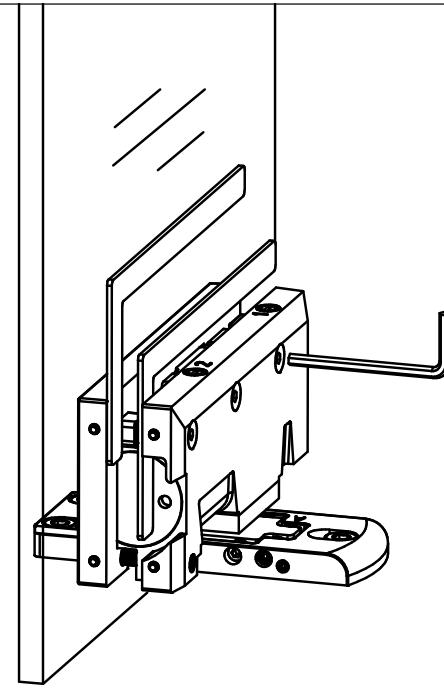


7

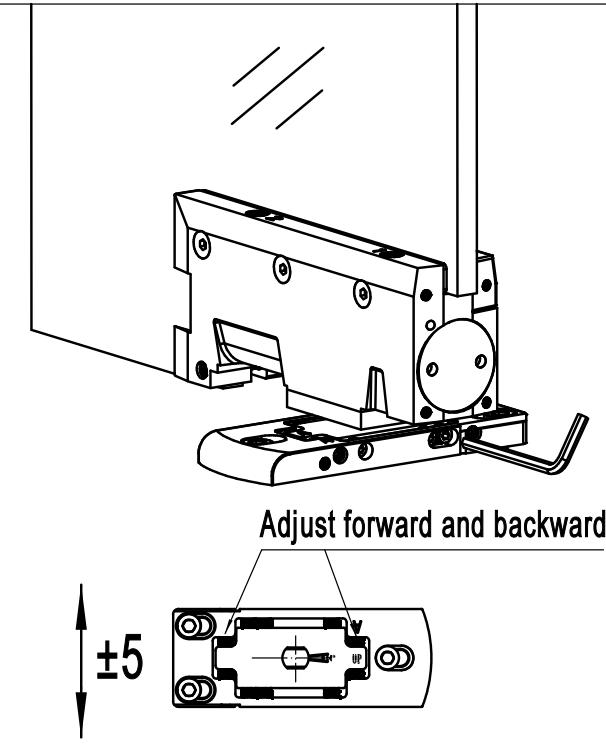


8

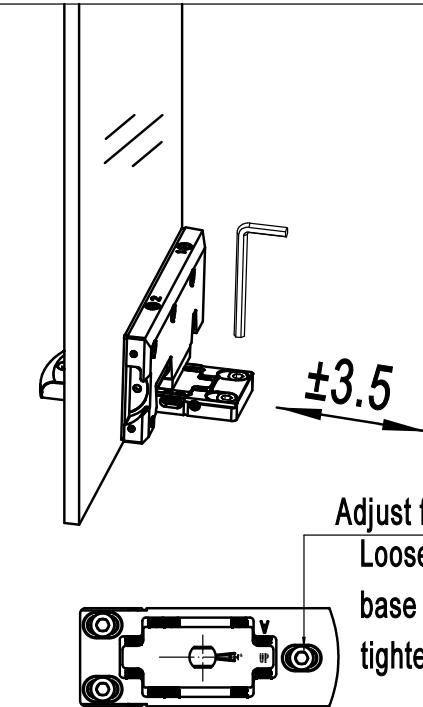


9

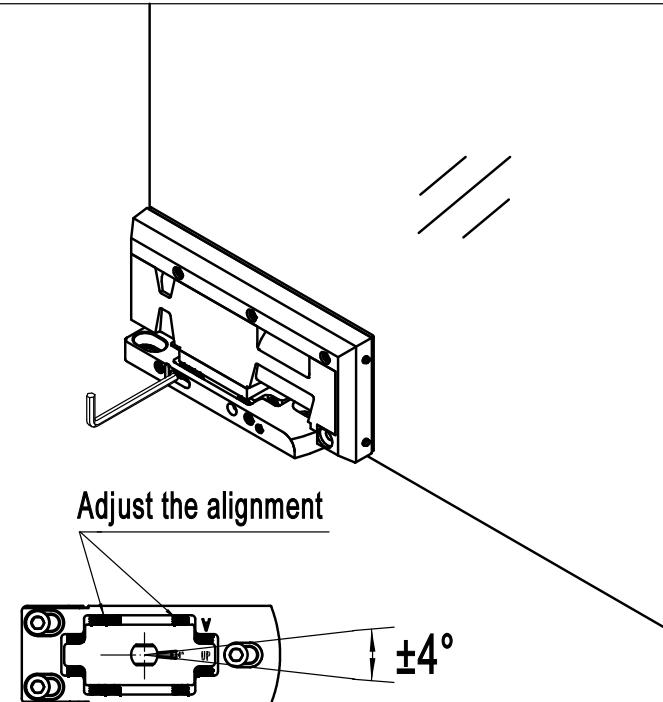

10

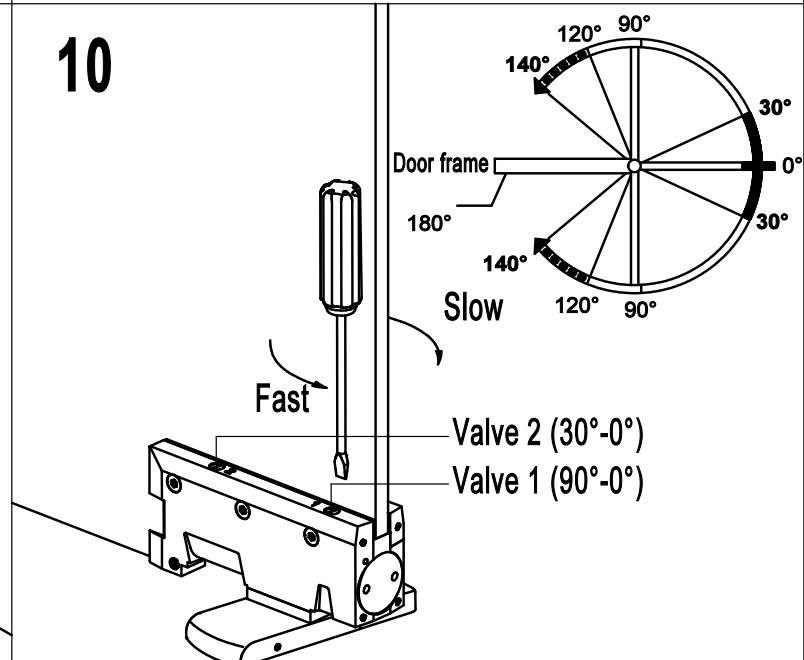

11

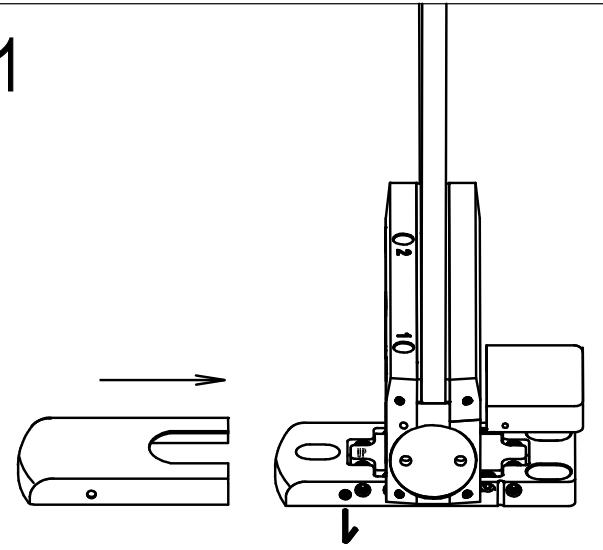

12

